


400 FENCE TOOL  
INSTRUCTION SHEET

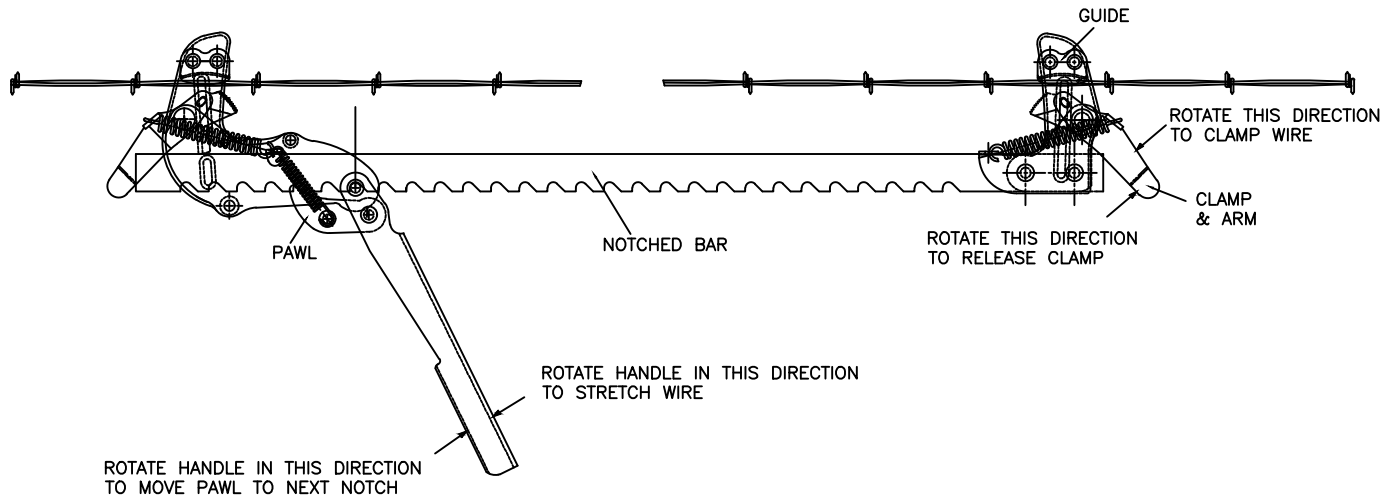

1. PLACE WIRE BETWEEN GUIDE AND CLAMP. ROTATE CLAMP AND ARM AS SHOWN TO CLAMP WIRE.
2. ROTATE HANDLE AS FAR AS POSSIBLE IN DIRECTION SHOWN TO STRETCH WIRE. ROTATE HANDLE IN OPPOSITE DIRECTION UNTIL PAWL DROPS BACK INTO NOTCHED BAR. REPEAT TO GET DESIRED TENSION.
3. AFTER WIRE ENDS HAVE BEEN JOINED TOGETHER SECURELY, RELEASE PRESSURE ON THE WIRE BY ROTATING THE HANDLE PARALLEL TO THE NOTCHED BAR. THE TRAVELING HOOK CAN BE EXTENDED THE FULL LENGTH OF THE STRETCHER WITH THE HANDLE IN THIS POSITION.
4. TO RELEASE THE CLAMP FROM THE WIRE ROTATE THE CLAMP AND ARM IN THE DIRECTION SHOWN. BE SURE THAT THE PRESSURE ON THE WIRE HAS BEEN RELEASED BEFORE DOING THIS. IT MAY BE NECESSARY TO TAP ARM WITH A HAMMER TO RELEASE CLAMP.
5. ONE END OF THE STRETCHER MAY BE HOOKED AROUND A POST TO STRETCH THE WIRE TO THE POST.